



SEP ELECTRONIC CORP.

# 1N5400 thru 1N5408

**3.0 A Plastic Silicon Rectifier**  
Rectifier Reverse Voltage 50 to 1000V



DO-27

## Features

- Diffused junction
- High current capability and low Forward Voltage Drop
- Surge overload rating to 200A peak
- Low reverse leakage current
- Plastic material has UL flammability classification 94V-0

## Mechanical Data


Case: Molded plastic

Terminals: Solder plated solderable per MIL-STD-202,  
Method 208

Polarity: Cathode band

Mounting Position: Any

Weight: 1.10 grams (approx)

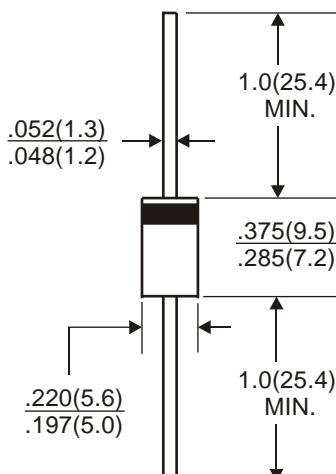

All dimensions inches and (millimeters)

## Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.  
For Capacitive load derate current by 20%.

Parameter	Symbol	1N5400	1N5401	1N5402	1N5404	1N5406	1N5407	1N5408	unit
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=75°C	IF(AV)					3.0			A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM					200			A
Typical thermal resistance per element	ReJA				30				°C/W
Typical junction capacitance per element	Cj				40				pF
Operating junction and storage temperature range	TJ, TSTG				-65 to + 175				°C


## Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.  
For Capacitive load derate by 20 %.


Parameter	Symbol	1N5400	1N5401	1N5402	1N5404	1N5406	1N5407	1N5408	Unit
Maximum instantaneous forward voltage drop per leg at 3.0A	VF				1.0				V
Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =100°C	IR				5.0 50.0				µA

**Rating and Characteristic Curves** (  $T_A=25^\circ\text{C}$  Unless otherwise noted )  
**1N5400 thru 1N5408**


**Fig. 1 Derating Curve for Output Rectified Current**

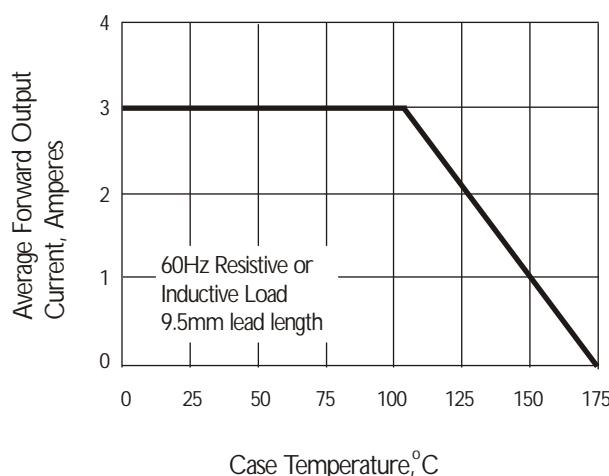


**Fig. 3 Typical Instantaneous Forward Characteristics**

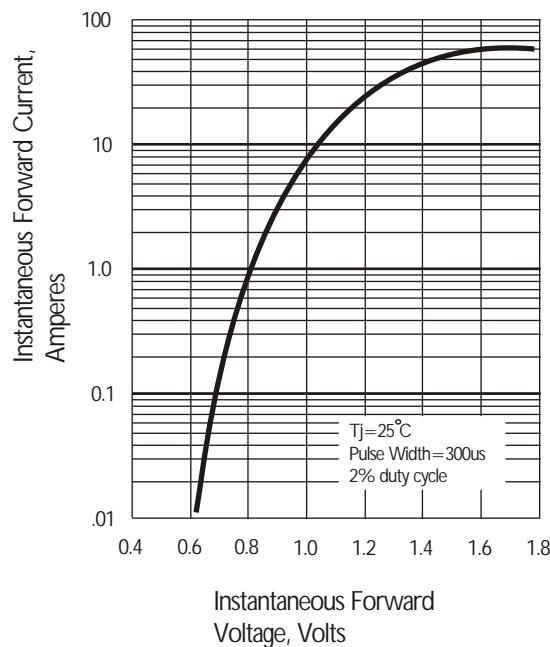

**Fig. 2 Peak Forward Surge Current**

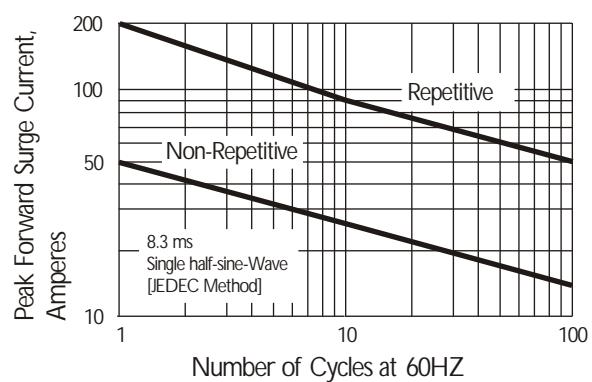

**Fig. 4 Typical Reverse Characteristics**

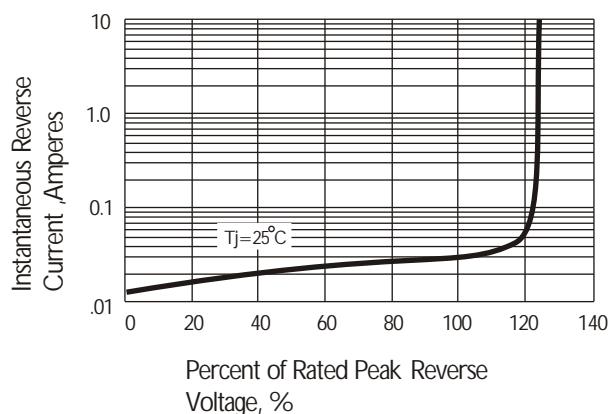

**Fig. 5 Typical Junction Capacitance**

