

1

2




3

HOUSING

Poles: 2-20
 Material: Nylon 66, UL94V-2
 COLOR: IVORY

SPECIFICATIONS

Voltage rating: AC 250V
 Current rating: AC,DC,3A
 Withstand voltage: AC 1000 V/min.
 Insulation resistance: 1000M Ω min.
 Temperature range: -25 C~+85 C
 Applicable PC board thickness: 0.8~1.6mm
 Contact resistance: Initial value/10 m Ω max.
 After environmental
 Testing/20 m Ω max.

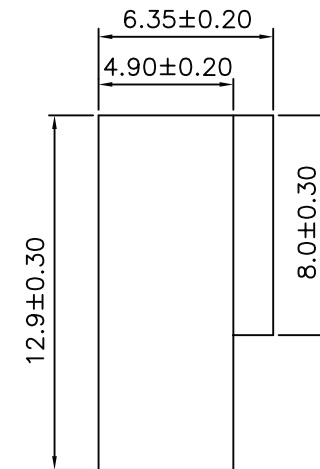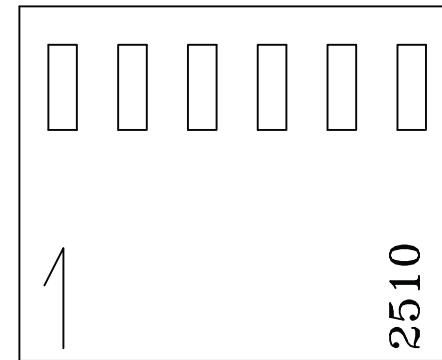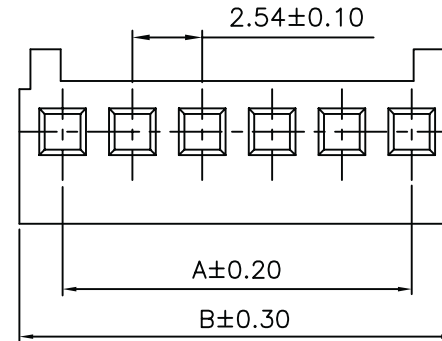

Poles	Part No.	Dimension in.(mm)	
		A	B
2	2542-H-02-LF	0.10(2.54)	0.223(5.68)
3	2542-H-03-LF	0.20(5.08)	0.324(8.22)
4	2542-H-04-LF	0.30(7.62)	0.424(10.76)
5	2542-H-05-LF	0.40(10.16)	0.524(13.30)
6	2542-H-06-LF	0.50(12.70)	0.624(15.84)
7	2542-H-07-LF	0.60(15.24)	0.724(18.38)
8	2542-H-08-LF	0.70(17.78)	0.824(20.92)
9	2542-H-09-LF	0.80(20.32)	0.924(23.46)
10	2542-H-10-LF	0.90(22.86)	1.024(26.00)
11	2542-H-11-LF	1.00(25.40)	1.124(28.54)
12	2542-H-12-LF	1.10(27.94)	1.224(31.08)
13	2542-H-13-LF	1.20(30.48)	1.324(33.62)
14	2542-H-14-LF	1.30(33.02)	1.424(36.16)
15	2542-H-15-LF	1.40(35.56)	1.524(38.70)
16	2542-H-16-LF	1.50(38.10)	1.624(41.24)
17	2542-H-17-LF	1.60(40.64)	1.724(43.89)
18	2542-H-18-LF	1.70(43.18)	1.824(46.32)
19	2542-H-19-LF	1.80(45.72)	1.924(48.86)
20	2542-H-20-LF	1.90(48.26)	2.024(50.80)

A

B

C

D