

# CONNECTOR

Poles: 2\*1~2\*12

Material: Post: Brass, Tin/Plated

Base: Nylon 66, UL94V-2

## SPECIFICATIONS

Voltage: 600V AC / DC

Current: :

POLES	2	4,6	8,10	12~24
AWG#18	9A	8A	7A	6A
AWG#20	7A	6A	5A	5A
AWG#22	5A	4A	4A	4A
AWG#24	4A	3A	3A	3A



Contact Resistance: 10mΩ Max.

Dielectric Withstanding Voltage: 1500V



Insulation Resistance: 1000MΩ Min.

Temperature: -40°C ~ +105°C

Part No.	Dimension in.(mm)	
	A	B
4200A1-WS-2x1	_____	0.213( 5.4)
4200A1-WS-2x2	0.165( 4.2)	0.378( 9.6)
4200A1-WS-2x3	0.331( 8.4)	0.543(13.8)
4200A1-WS-2x4	0.496(12.6)	0.717(18.2)
4200A1-WS-2x5	0.661(16.8)	0.874(22.2)
4200A1-WS-2x6	0.827(21.0)	1.039(26.4)
4200A1-WS-2x7	0.992(25.2)	1.205(30.6)
4200A1-WS-2x8	1.160(29.4)	1.370(34.8)
4200A1-WS-2x9	1.323(33.6)	1.535(39.0)
4200A1-WS-2x10	1.488(37.8)	1.701(43.2)
4200A1-WS-2x11	1.654(42.0)	1.866(47.4)
4200A1-WS-2x12	1.819(46.2)	2.047(52.0)

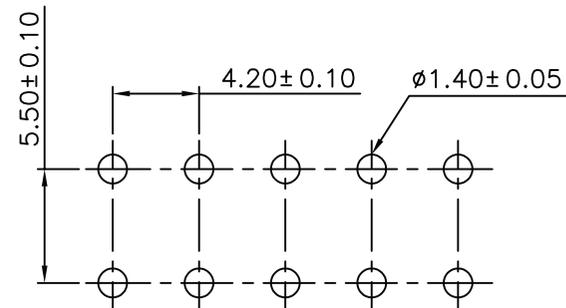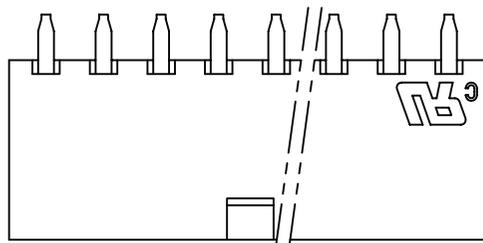

P C B LAYOUT

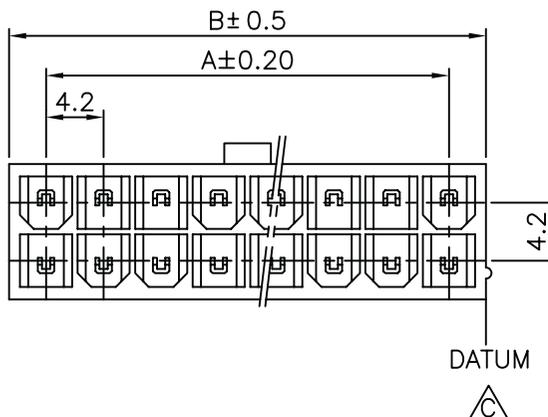

DRAWN:

GENERAL TOLERANCE:

CHECKED:

UNIT:

SIZE

SCALE:

SHEET:

DESCRIPTION:

A4

PROJECTION:

PART NO:

G17-xxP-S

JECSON

REV

Date

FILE

BY

D

C

B

A