



SPECIFICATIONS
Rated Current:3.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40*c to +105*c

Contact Material:Brass
Contact Plating:Au Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Max.Processing Temp: 230°C for 30-60 seconds
(260°C for 10 seconds)

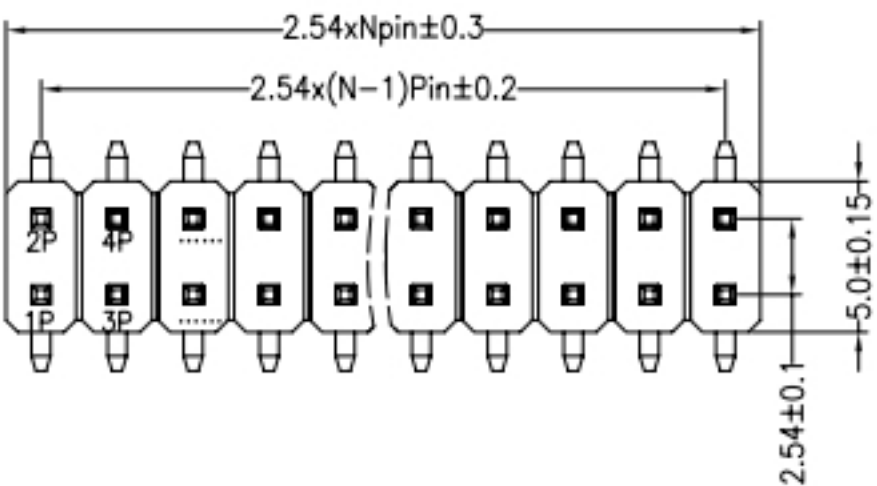

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

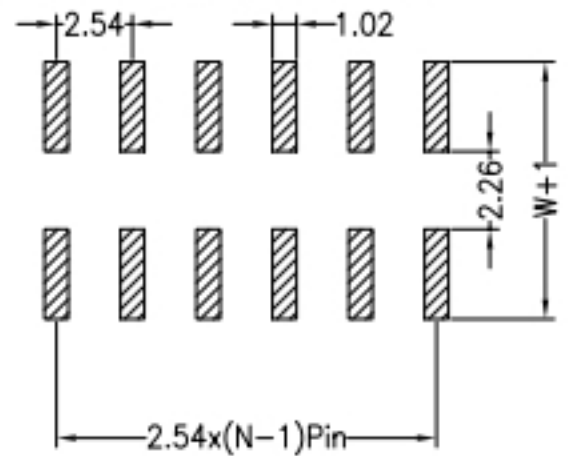

Ordering Information

1225 -12 XX C N G0 M XXX X 01



No.of Pins Per Row
1x40
2x40
3x40
1--40
2--80
3--120

Insulator Material Option
A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
F=BK-LCP

Contact Plating
G0:Gold Flash
G1:3U* Gold
G3:10U* Gold
G4:15U* Gold
G5:30U* Gold
S0:Gold Flash/Tin
SN:Tin

Pin Length
Pin Length

Packing
0=PE Bag
A=Tray
T=Tube
P=Tube+Cap
R=Reel+Cap
M=Reel+Mylar

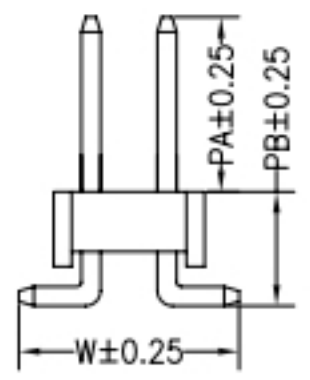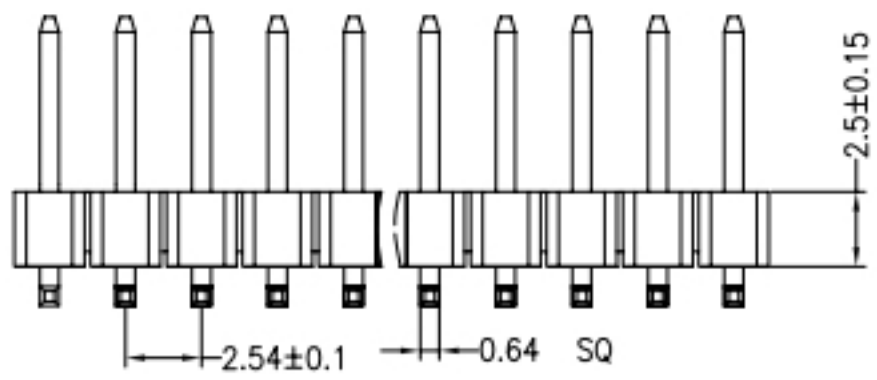

Dimension antitheses list				
ITEM	PA	PB	W	L
Standard	6.00	3.20	7.50	11.00
Alternate				