


- FEATURES:**
- 1 Electrical Test:
 - A. Safety Voltage/Current Rating 150V ac, at 1.5A.
 - B. Dielectric with standing 1000V/DC/min, <0.5A.
 - C. Insulation Resistance:>500M Ω, 1000V./min
 - D. Contact Resistance:<20M Ω
 - 2 Mechanical:
 - A. Cable-to-Plug tensile strength-20LBs (89N) min.
 - B. Durability:750 mating cycles.
 - 3 Operation Temperature:-40℃~+85℃.
 4. Environmental compliance
 - 3 A, the products are compliant with the RoHS, and REACH ETC.
 5. Safety standards:UL E239560

注：帶▲為重點尺寸控制

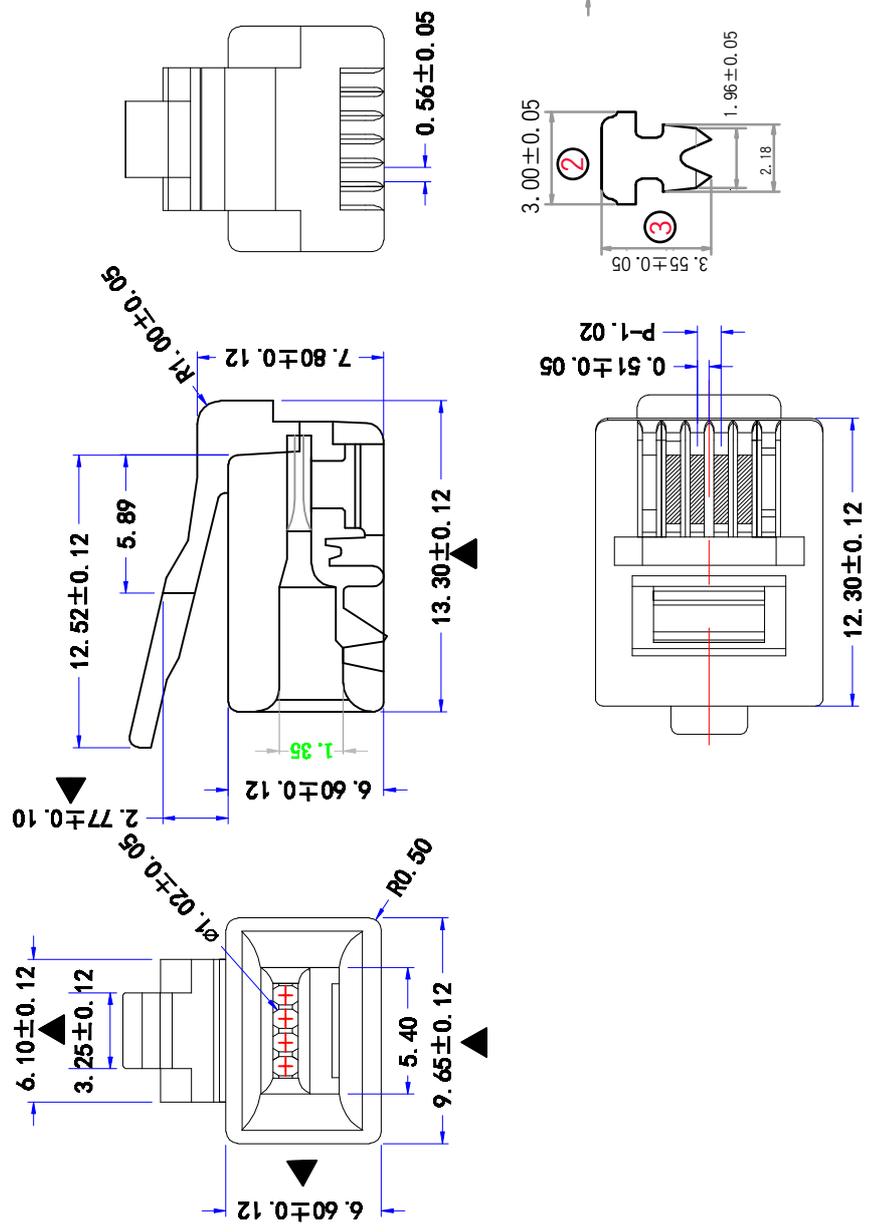

| | | | | | |
|---|------------------------|-------------|------------|-------------|------------|
| TITLE 產品名稱 | 6PAC-方孔 | | | 頁次 SHEET | 1/1 |
| 膠殼PC (聚碳酸酯) | 單位 UNIT | 比例 SCALE | 1:1 | 版本 EDIT1 | A/0 |
| DIMENSION IN mm (Unless TO BE IN INCH UNLESS OTHERWISE SPECIFIED) | 繪圖 DRAWN | 日期 DATE | 2018.10.07 | 審核 CHECK | 日期 DATE |
| 2. X ±0.8 | THIRD ANGLE PROJECTION | 日期 DATE | 2018.10.07 | 批准 APPRO | 日期 DATE |
| 2. XX ±0.10 | | 日期 DATE | 2018.10.07 | | 日期 DATE |
| 2. XXX ±0.050 | | 日期 DATE | 2018.10.07 | | 日期 DATE |