
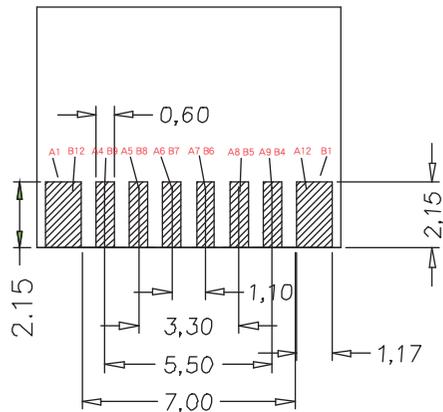


PIN	SIGNAL NAME	PIN	SIGNAL NAME
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

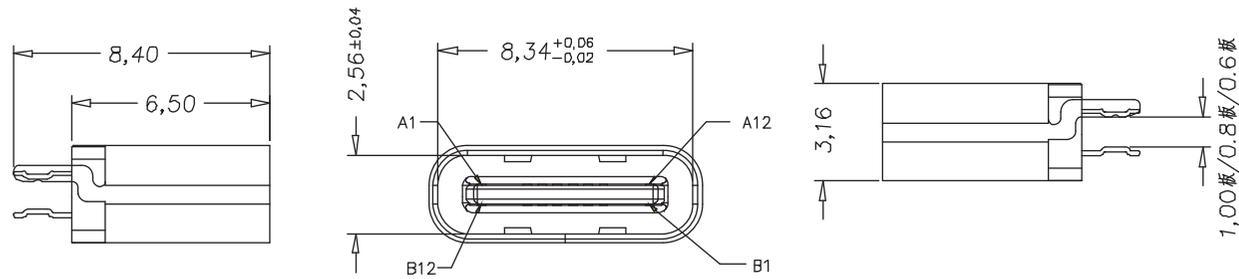

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

備註

1. 材質：

1.1 膠芯：LCP+30%G.F UL94V-0

1.2 端子：磷銅，T=0.12mm；鍍底，鍍金 1μ”

1.3 外殼：不銹鋼，T=0.30mm；表面鍍鎳 100μ”
或亮錫 100μ”

2. 主要特性：

2.1 額定電流：0.5A

2.2 接觸阻抗：30mΩ MAX

2.3 絕緣阻抗：100MΩ MIN 250V DC

2.4 耐壓測試：250V AC

2.5 沾錫性：溫度 250±5℃，時間 5±0.5s

2.6 整體插入力：3.57kgf MAX

整體拔出力：1.02kgf MIN

2.7 使用壽命：10000 次

2.8 工作溫度：-30℃~+80℃

TOLERANCES		Type-C 母座 16PIN (夾板帶腳 6.5mm)	
.X	±0.30	APPD:	DRAWING NO.:
.XX	±0.20	CHECK:	REV:
.XXX	±0.10	DRAWN:	SIZE:
ANGLES	±3.00°		UNIT:
			SCALE:
			SHEET:
		A/O	MM
		A4	1:1
			1/1