


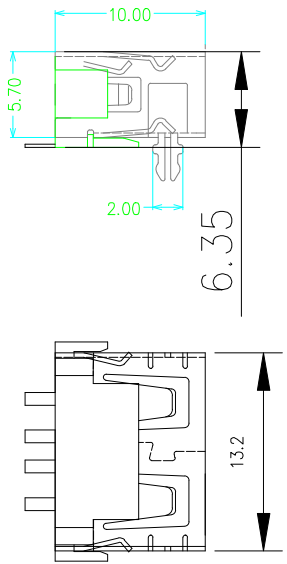


NO.	PART NO.	NAME	MATERIAL	COLLR	QTY
1	A02-CADXX2000	USB A/F 接口0.6间距5.0间距 90°(5.0间距)	Copper Alloy/SPCC		1PCS
2	A02-A000XXXX	USB A/F 接口0.6间距	PBT		1PCS
3	A02-E020XXXX	USB A/F 90°DIP 间距(2.3,5.0间距)	Copper Alloy		4PCS

REVISIONS		
LET	DESCRIPTION	DATE
AX1	初行版	2011.08.28
A	重新设计图面	2011.09.09

NOTES:
 1. MATERIAL SPECIFICATION
 1) INSULATION MATERIAL THERMOPLASTIC.
 2) SHELL: COPPER ALLOY/SPCC, T: 0.30mm
 PLATING: NICKEL
 3) TERMINAL: COPPER ALLOY, T: 0.25mm
 PLATING: GOLD/TIN PLATED.
 2. ELECTRICAL CHARACTERISTIC:
 1) INSULATION RESISTANCE: 1000MΩ MIN.
 2) CONTACT RESISTANCE: 30mΩ MAX.
 3) WITHSTANDING VOLTAGE: 500V AC.
 3. MECHANICAL CHARACTERISTICS:
 1) INSERTION FORCE: 3.57Kgf MAX.
 2) EXTRACTION FORCE: 1.02Kgf MIN.

ORDERING INFORMATION

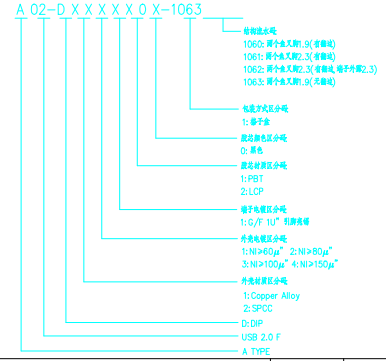

RECOMMENDED P.C.B LAYOUT

	TOLERANCE				
	X.	X.X	X.XX	X.XXX	X.*
A	± 0.20	± 0.10	± 0.05	± 0.03	± 1*
B	± 0.50	± 0.20	± 0.10	± 0.05	± 2*
✓ C	± 0.80	± 0.40	± 0.20	± 0.10	± 3*

MATERIAL:	UNIT:	THIRD ANGLE	DRAWING BY	Brand/Model:
SUPERFICIES:	SCALE:		SU	USB A/F 90°DIP 间距0.6 5.0间距 接口间距0.3间距
COLOR:	REV:		QING	PART NAME:
	A		LEE	Assembly
			APPROVED	DRAWING NO.
			DATE:	A 02-DXXXXXX-0063
			2011.09.09	USER'S OR TOOLING NO.
				XL001-1B-1