


Curve Chart(Be Confined To TECI-127064040):

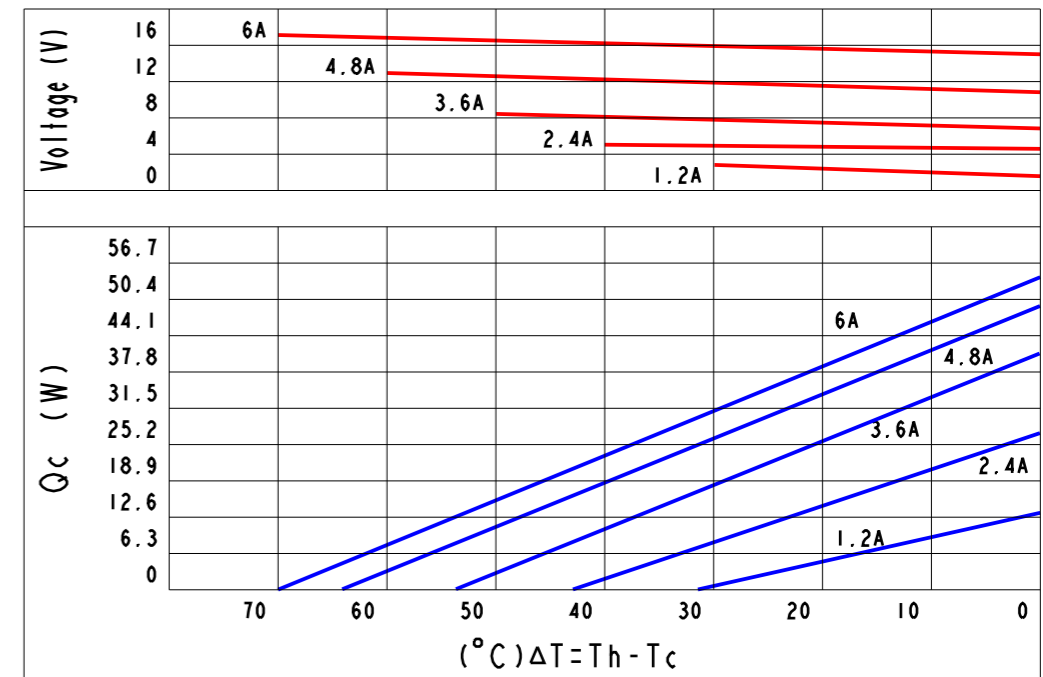

Part Number And Feature:

T	E	C	I	-	1	2	7	x	x	4	0	4	0	Sealing	YES
↓	↓				↓	↓	↓	↓	↓	↓	↓	↓	↓	Operation Temperature	125°C(Max.)
Thermo	Electric	Chip	Stage	Stack	N & P	Stack	Quantity	Current	A(Max.)	Dimension	(A)	Dimension	(B)	Melting Point	138°C
														Storage Temperature	-60°C~100°C
														RoHS	YES

Technical Data:


ITEM	Part NO.	Stack(P&N)	A(Max.)	V(Max.)	Qc(W) /Th=27°C/ ΔT(°C)	DIM(A)	DIM(B)	DIM(H)
1	TECI-127064040	127	6 A	15.2 V	56W / 70°C	40	40	RF3.7

Notes:

1. Printing always on cold side.
2. Tolerance of thermo and electric parameters ±10%.
3. Please mount heat sink before you use it. also, please do not exceed the extra voltage at any time.
4. Please contact with us if you need Melting Point 183°C (Operation Temperature 150°C Max.) and 235°C (Operation Temperature 200°C Max.) type.

\*DO NOT SCALE DRAWING

THIRD ANGLE PROJECTION



THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HERewith IS NOT TO BE REPR ODUCEd USED OR DISCLOSED OR IN PART TO ANYONE WITHOUT THE PERMISSION OF KJLP (SHENZHEN) ELECTRONICS CO., LTD.

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE MM  
2. TOLERANCE ARE AS FOLLOWS:  
0 < X < 2 ± 0.06  
2 < X < 10 ± 0.08  
10 < X < 50 ± 0.12  
50 < X < 100 ± 0.16  
100 < X < 200 ± 0.20  
200 < X < 300 ± 0.30  
ANGLES ± 0.5°

PART No.	TECI-127064040	DESCRIPTION	DC 15.2V(Max.), 6A(Max.), 127 P&N, 40*40mm				
SIGNATURE		DATE					
DRAWN BY	Gary	2013/09/09					
CHECKED BY	Justin	2013/09/09					
ENGR	Vivi	2013/09/09					
APPROVED BY	Mason	2013/09/09	CAD MODLE:	TECI-127064040.prt	SCALE: 1:1	REV: A	
MATERIAL:	ISSUED BY	Jack	2013/09/09	CAD DWG:	TECI-127064040.drw	SIZE: A3	SHEET: 1 OF 1